


Bare Cu Strand

- Standard : AS/NZS 1125
- Conductor : Plain Annealed Copper Wire
AS/NZS 1125, Class 2

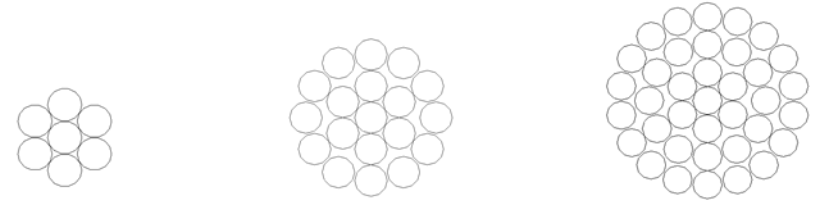

Item Code	Size	Nominal Stranding	Approx. diameter of strand	Approx. strand weight	DC Conductor Resistance @ 20°C
	mm ²		mm	kg/km	Ω/km
1221970000	16	7/1.70	5.1	140	1.15
1222010000	25	7/2.14	6.4	220	0.727
1222023000	35	19/1.53	7.7	310	0.524
1222060000	70	19/2.14	10.7	600	0.268
1222050000	95	37/1.78	12.5	820	0.193
1222100000	120	37/2.03	14.2	1,060	0.153

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of MM Cables is indicative only and shall not be binding on MM Cables or be treated as constituting a representation on the part of MM Cables.